

PCIe 2-Port 25G SFP28 NetworkAdapter

User Manual

Ver. 1.00

**All brand names and trademarks are properties of their
respective owners.**

Contents:

Chapter 1: Introduction.....	3
1.1 Product Introduction	3
1.2 Features.....	3
1.3 Requirements	4
1.4 Package Contents	4
Chapter 2: Getting Started.....	5
2.1 Hardware Layout.....	5
2.2 Hardware Installation.....	6
2.3 Driver Installation.....	7
2.3.1 Installation for Windows	7
2.3.2 Installation for Linux.....	7
2.4 Verifying the installation.....	8
2.4.1 Verifying for Windows	8
2.4.2 Verifying for Linux	9

Chapter 1: Introduction

1.1 Product Introduction

This high performance PCIe 2-Port SFP28 Network Adapter provides two SFP28 ports for network connection of data rate up to 25Gbps. By using Intel's top of the class E810 Ethernet controller, the adapter is designed to optimize high-performance system workloads for Cloud and Communications.

1.2 Features

- PCIe Gen4 x8 form factor
- Supports low-profile systems
- Provides 2 x SFP28 ports for multiple high-speed connections
- Various performance optimization technologies: ADQ, DDP, DPDK
- Supports 25Gbps SFP28 and 10Gbps SFP + optics, AOC and DAC modules
- Supports IEEE1588 PTP v2 Precision Time Protocol

1.3 Requirements

Hardware

The following system specs are recommended minimum

- PCIe slot: Available 8-Lane PCI-Express slot Gen 4.0 or later
- Processor: Quad Core 3.0GHz or higher
- RAM: 4GB memory or higher

Software

Operating systems supported


- Windows 11
- Windows Server 2016/2019/2022
- Linux 3.16 or later

1.4 Package Contents

- 1 x PCIe 2-Port 25G SFP Network Adapter
- 1 x User Manual

Chapter 2: Getting Started

2.1 Hardware Layout

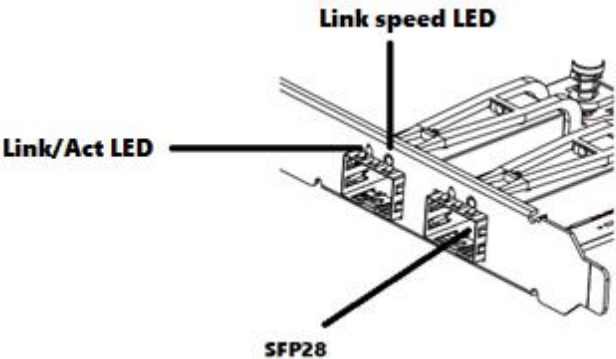

Link/Activity Indicator:

LED	Description
Link Speed LED	Indicates Link Speed: <ul style="list-style-type: none">• Solid Green = 25Gbps• Solid Amber = 10Gbps

Link /Activity LED	<p>Indicates Network Card Activity:</p> <ul style="list-style-type: none"> • Solid Green = Network port is connected • Flashing Green = Network port is active • Off = No link
-------------------------------	---

2.2 Hardware Installation

1. Turn off the power to your computer.
2. Unplug the power cord and remove your computer's cover.
3. Remove the slot bracket from an available PCIe slot.
4. To install the card, carefully align the card's bus connector with the selected PCIe slot on the motherboard. Push the board down firmly.
5. Replace the slot bracket's holding screw to secure the card.
6. Secure the computer cover and reconnect the power cord.

2.3 Driver Installation

The following section shows you how to install PCIe 4-Port 25G SFP28 Network Adapter driver on different operating systems.

2.3.1 Installation for Windows

1. Go to URL <http://www.sunrichtech.com.hk/>
2. Search N-611, download the driver.
3. Follow the on-screen instructions to finish installing the driver.

2.3.2 Installation for Linux


1. Go to URL <http://www.sunrichtech.com.hk/>
2. Search N-611, download the driver.
3. Follow Readme.txt which is in the driver folder to finish installing the driver.

2.4 Verifying the installation


2.4.1 Verifying for Windows

1. Click on the **“Device Manager”** tab in the Windows Control Panel.

Start > Control Panel > Device Manager

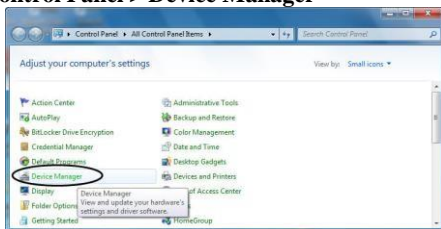

2. Expand **“Network adapters”** item, and you can read **“Intel(R) E810 Network Connection”** in the Device Manager.



2.4.2 Verifying for Linux

1. You can check whether the driver is loading by using following commands:

```
# lsmod | grep
```

```
# ifconfig -a
```

If there is a device name, ethX, shown on the monitor, the linux driver is load. Then, you can use the following command to activate the ethX.

```
# ifconfig ethX up, where X=0,1,2,...
```